

Pressure Switch With Gauge For Nitrogen / High and Low



Features:

- Nitrogen / AIR/CO₂/N₂O/OXY reserve systems
- Nitrogen / air and oxygen reserve systems
- Instrument quality snap-action switch
- Normally open or normally closed contacts
- Nema 4 water-tight housing
- 10-250 psi (adjustable range)
- Factory cleaned and sealed for oxygen service

General Specifications:

Pressure switch with gauge assembly for the medical gas alarm system shall incorporate a U.L. Listed single pole doublethrow snapaction switching element. Electrical connections are made through a 1/2" conduit connection to screw terminals on the switch. The switch may be wired normally open or normally closed. Electrical rating shall be 10 Ampere 120 volt AC.

The pressure switch has a proof pressure of 1000 psi with an adjustable range of 10 to 230 psi decreasing pressure or 11 to 250 psi increasing pressure. Only for nitrogen provide one switch for the high pressure alarm and one for the low pressure alarm signal.

The enclosure is a Nema 4 water tight housing with a 1/4" NPT gas service line connection and a 1/2" NPT conduit hub .

A gauge is incorporated with a gas specific DISS nut and nipple that is attached to a 1/8" tee that houses the gauge.


The Pressure Gauge Assembly will then be mounted directly to a gas specific DISS demand check (provided by Amico) directly onto the pipeline. The demand check shall have a 1/4" Male NPT connection.

The Pressure Switch is UL Listed and CSA Approved.



Technical Specifications



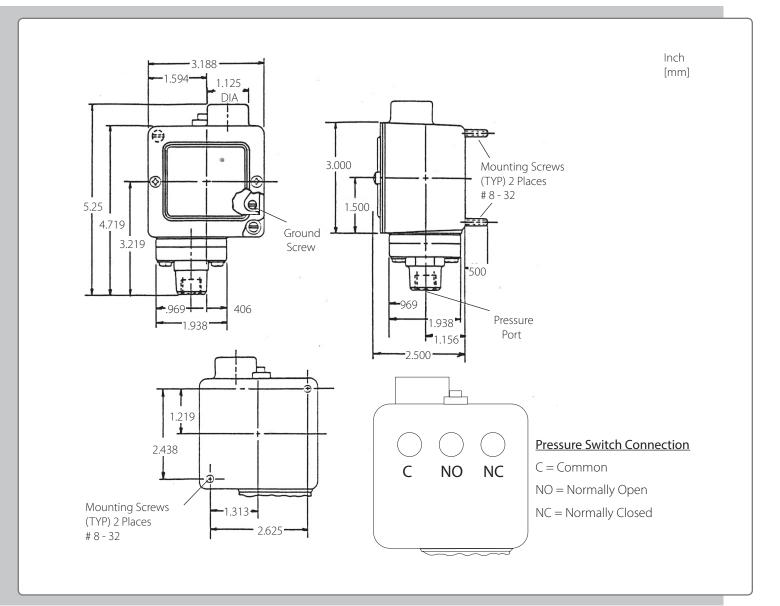

Model Numbers

Nitrogen = P-DPRSW-GAHL-NIT

Instrument Air = P-DPRSW-GAHL-INA

Amico Corporation 85 Fulton Way, Richmond Hill, ON L4B 2N4, Canada | 71 East Industry Court, Deer Park, NY 11729, USA Toll Free Tel: 1.877.462.6426 | Toll Free Fax: 1.866.440.4986 | Tel: 905.764.0800 | Fax: 905.764.0862