Solar Series - MRI

White LED Curved Recessed Slot Light



MRI Compatible

Product Description

The White LED Curved Recessed Slot Lights are designed for MRI suite applications with a non-ferrous assembly which can be mounted in recessed applications within the MRI room. Consult factory for custom shapes. Contains no on-board electronics therefore will not interfere with MRI imaging. Certified to meet MRI vendor EMI requirements. MRI applications require EMI free emissions for specific frequency bands. All drive circuitry employs linear regulation and no pulse width modulation (PWM*).

Performance Summary

Input Power: 23 wattsLimited Warranty: 3 years

· Lifetime: Designed to last 50,000 hours

• Dimming: Linear

| Mechanical | | | | |
|-----------------------|---------|----------------|---------|-----------------|
| | Minimum | Typical | Maximum | Units |
| Package | - | LED Strip | - | - |
| Electrical Connection | - | Junction Box | - | - |
| Dimensions | - | 6.75W x 6.375D | - | inches |
| Fixture Weight | - | 21.5 | - | lbs per Section |

| Electrical | | | | |
|---------------|---------|---------|---------|-------|
| | Minimum | Typical | Maximum | Units |
| Input Voltage | - | 12 | - | Vdc |
| Input Current | - | 1.9 | - | Α |
| Input Power | - | 23 | - | W |
| Heat | - | 78 | - | BTU/h |

| Compliance | | | | |
|------------|---------|---------|---------|---------------------------|
| | Minimum | Typical | Maximum | Units |
| IP | 25 | - | - | Dry Location |
| Regulatory | - | Listed | - | UL 2108 CSA 22.2#250.0 |
| RoHS | - | Pending | - | 2011/65/EU |

| Environmental | | | | |
|-----------------------|---------|---------|---------|-------|
| | Minimum | Typical | Maximum | Units |
| Storage Temperature | -40 | 25 | 85 | C |
| Operating Temperature | -20 | 25 | 35 | C |
| Humidity | 5 | - | 95 | % |
| Lifespan | 50000 | - | - | Hours |
| Warranty | 3 | - | - | Years |

Installation Notes

An Amico RF Filter is required for proper operation in the MRI suite
An Amico Power Supply is required for proper operation in the MRI suite
*PWM is known to cause image artifacts, audible noise and light flicker











| Ordering Information | | | | |
|----------------------|--------------------------------------|--|--|--|
| Part Number | Description | | | |
| 1-07-000089 | White LED Curved Recessed Slot Light | | | |

| Photometric Data and IES Distribution | | | | |
|---------------------------------------|---------|---------|---------|-------|
| | Minimum | Typical | Maximum | Units |
| Luminous Flux (per section) | 850 | - | - | lm |
| ССТ | - | 3100 | - | k |
| CRI | 72.9 | - | - | |
| Chromaticity (u') | - | 0.244 | - | |
| Chromaticity (v') | - | 0.519 | - | |
| Efficacy | ÷ | 73 | - | lm/W |

Spectral Data Over Visible Wavelength

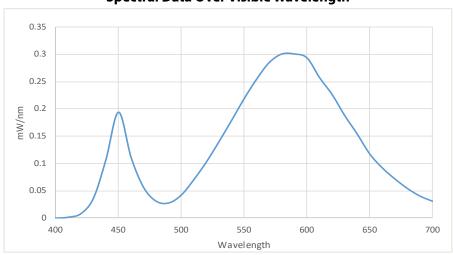

Mechanical Dimensions*†

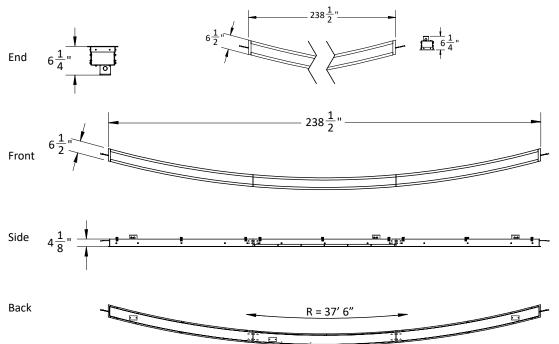

^{*} For informational purposes only. Content subject to change.







[†] Standard dimensions shown, contact factory for custom lengths.