
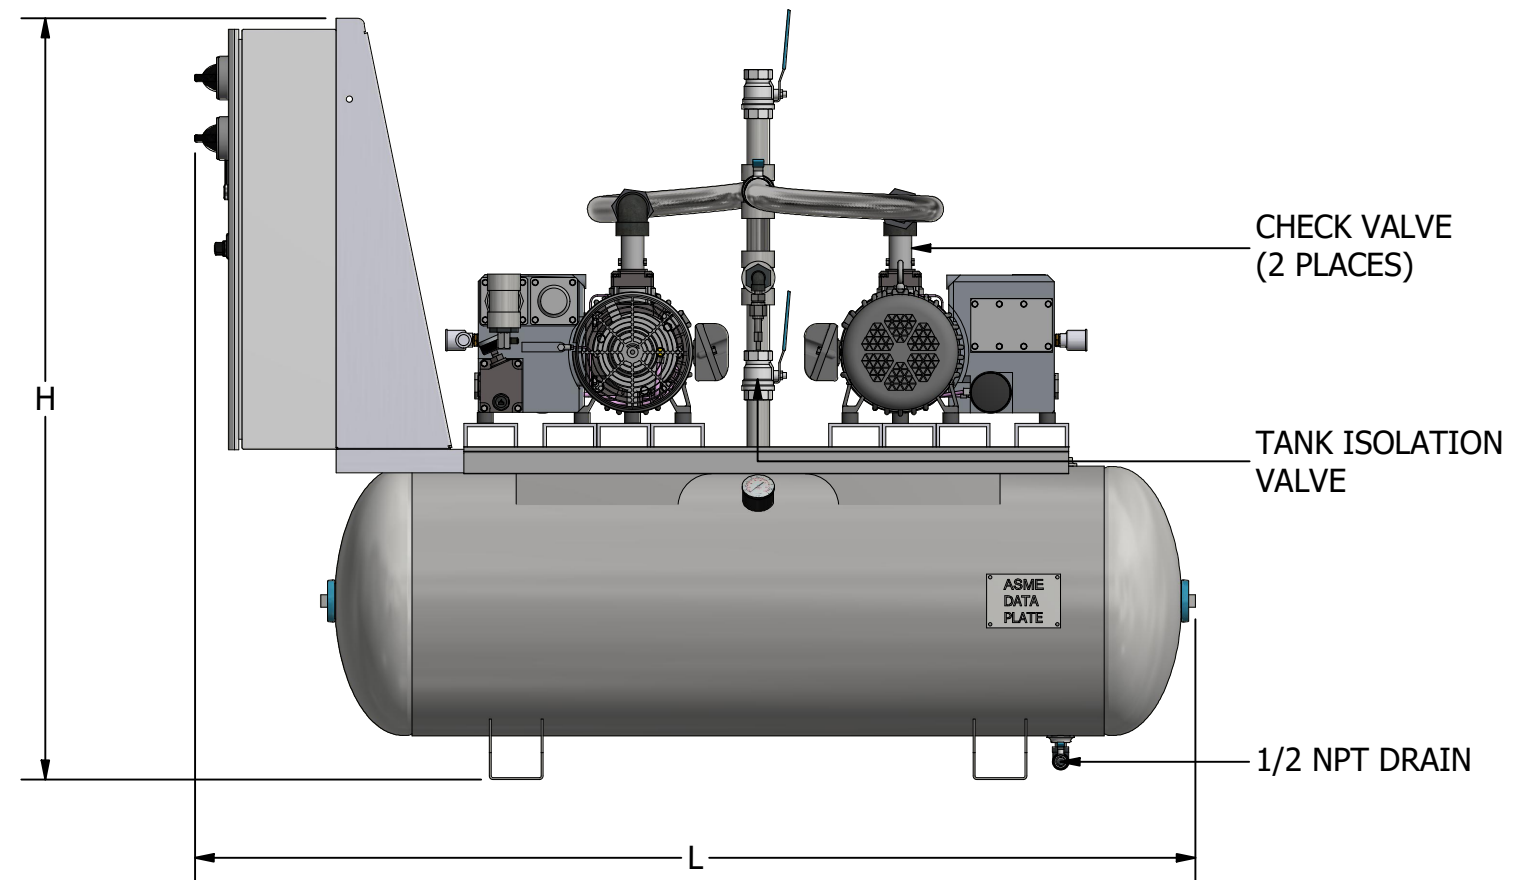
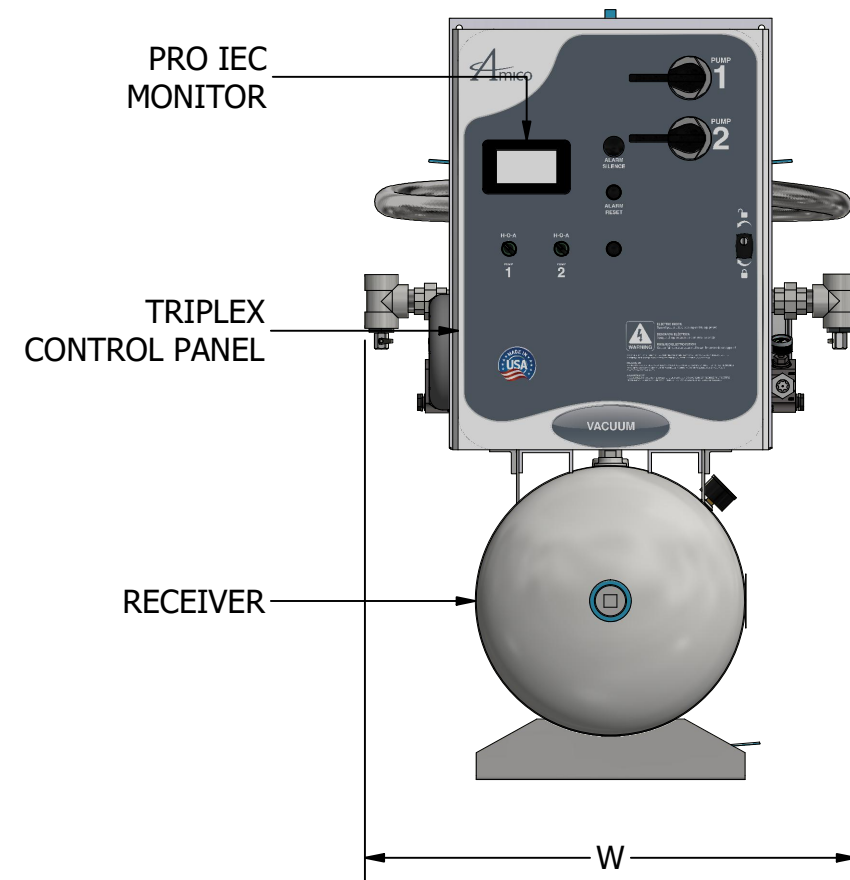
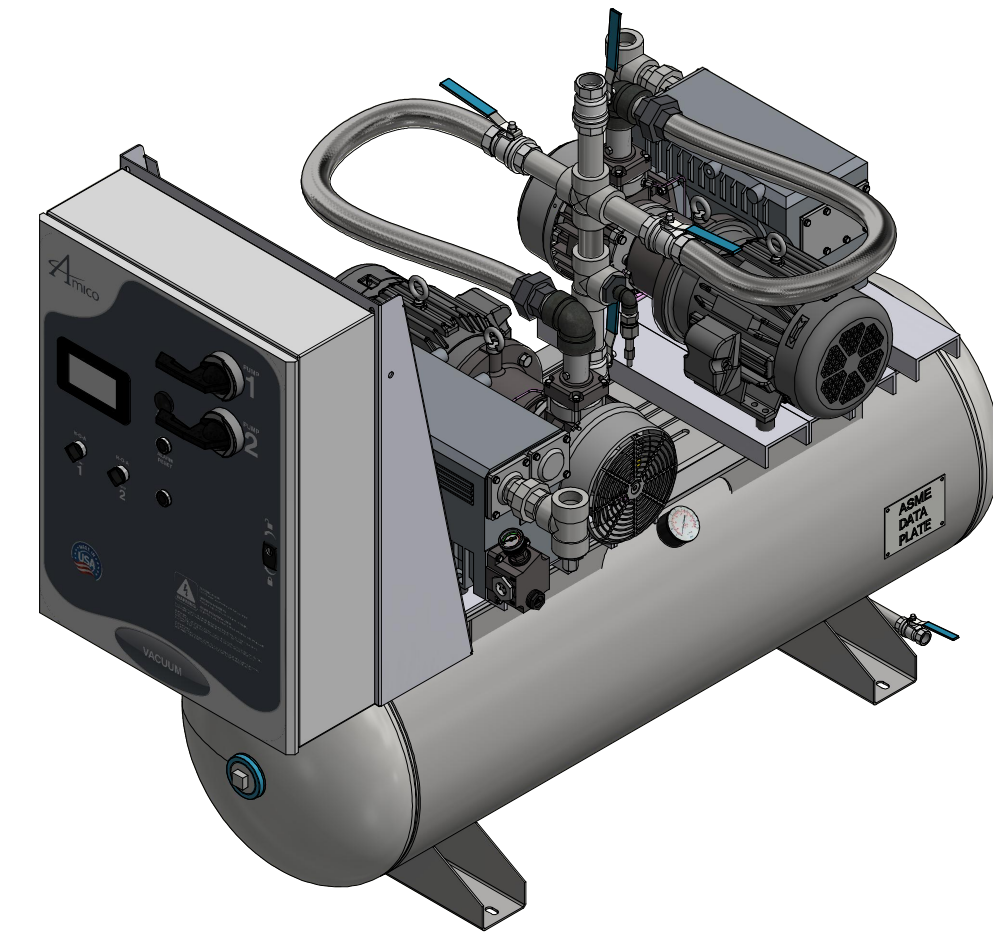


ROTARY VANE - LUBRICATED DUPLEX TANK MOUNTED VACUUM SYSTEM (1.0 HP - 10.0 HP)

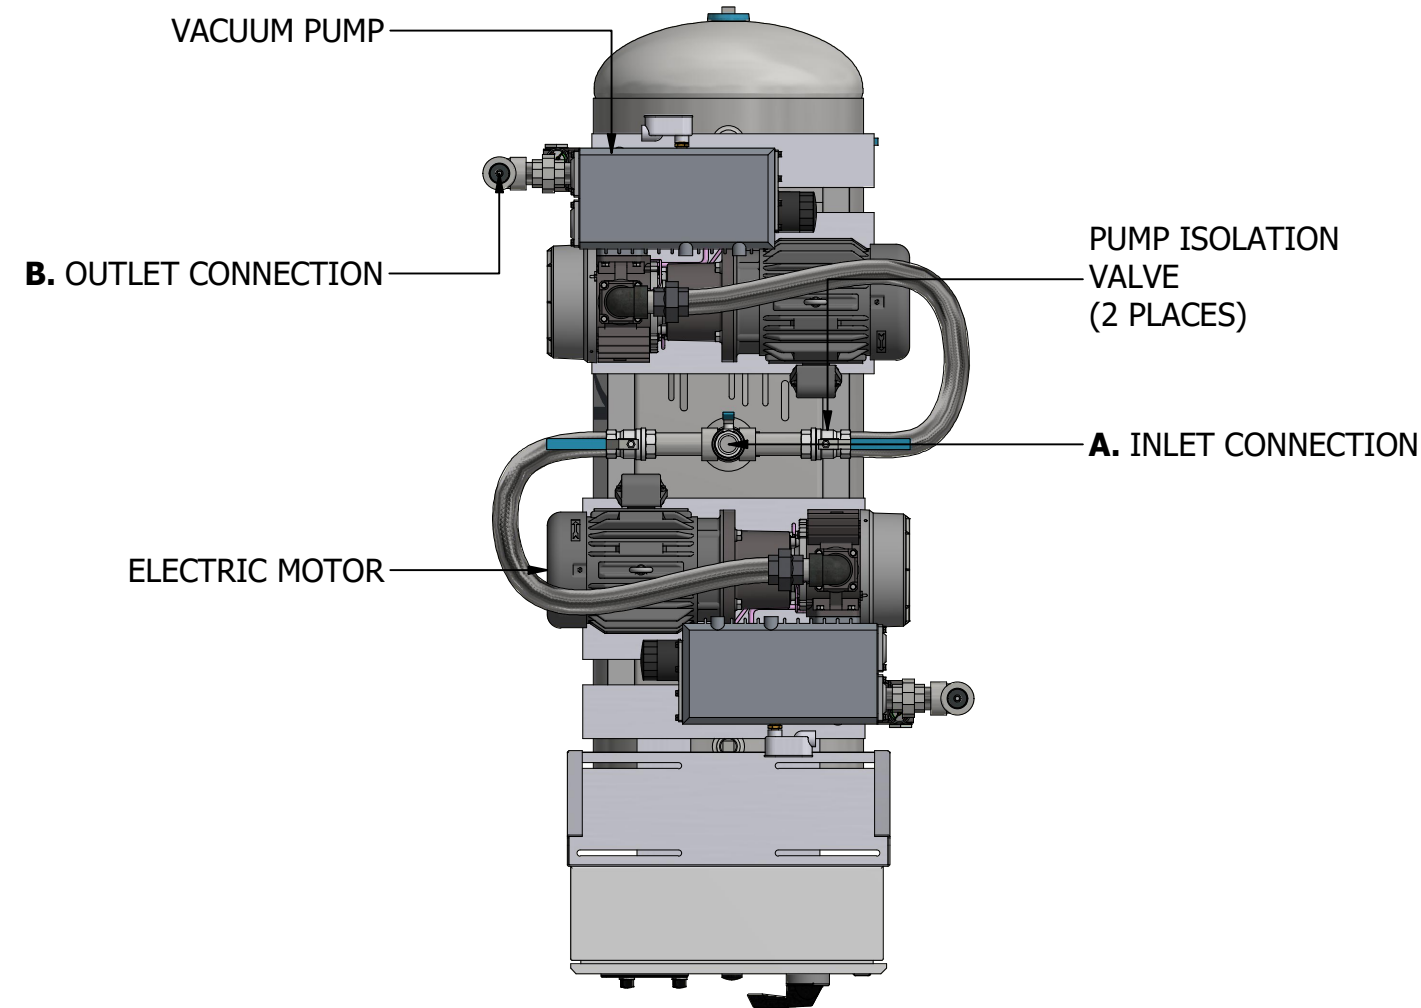

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL	HP (kW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL PUMPS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V**	460V					
V-RVL-D-080P-TH-N-010*	1 (0.75)	0.75	0.75	80 (303)	4.0 (113)	4.8 (136)	4.0 (113)	4.8 (136)	551 (250)	14.1 (1.32)	11	11	6	6	2,544	66	27 (0.69)	75 (1.91)	60 (1.52)
V-RVL-D-080P-TH-N-015*	1.5 (1.12)	1.25	1.25	80 (303)	5.8 (164)	7.0 (198)	5.8 (164)	7.0 (198)	725 (329)	18.2 (1.69)	13	13	7	6	3,817	63	38 (0.97)	75 (1.91)	60 (1.52)
V-RVL-D-080P-TH-N-020*	2 (1.49)	1.25	1.25	80 (303)	9.2 (261)	11.0 (311)	9.2 (261)	11.0 (311)	753 (342)	18.2 (1.69)	15	15	8	7	5,089	66	38 (0.97)	75 (1.91)	60 (1.52)
V-RVL-D-080P-TH-N-030	3 (2.24)	1.25	1.25	80 (303)	14.2 (402)	17.0 (481)	14.2 (402)	17.0 (481)	907 (411)	20.8 (1.93)	21	20	11	11	7,633	66	40 (1.02)	78 (1.98)	60 (1.52)
V-RVL-D-120P-TH-N-050*	5 (3.73)	1.25	1.25	120 (454)	21.7 (614)	26.0 (736)	21.7 (614)	26.0 (736)	1078 (489)	23.9 (2.22)	32	30	16	15	12,722	68	44 (1.12)	80 (2.03)	64 (1.63)
V-RVL-D-120P-TH-N-052*	5 (3.73)	2.0	2.0	120 (454)	30.8 (872)	37.0 (1048)	30.8 (872)	37.0 (1048)	1117 (507)	33.3 (3.09)	33	30	18	15	12,722	72	68 (1.73)	84 (2.13)	68 (1.73)
V-RVL-D-120P-TH-N-075*	7.5 (5.59)	2.0	2.0	120 (454)	43.3 (1226)	52.0 (1472)	43.3 (1226)	52.0 (1472)	1502 (681)	33.3 (3.09)	48	47	25	24	19,083	74	63 (1.60)	84 (2.13)	68 (1.73)
V-RVL-D-120P-TH-N-100*	10 (7.46)	2.0	2.0	120 (454)	54.2 (1535)	65.0 (1841)	54.2 (1535)	65.0 (1841)	1602 (727)	37.1 (3.45)	58	56	29	28	25,444	74	63 (1.60)	85 (2.16)	68 (1.73)
V-RVL-D-120P-TH-N-101*	10 (7.46)	2.0	2.0	120 (454)	64.2 (1818)	77.0 (2180)	64.2 (1818)	77.0 (2180)	1782 (808)	37.1 (3.45)	58	56	29	28	25,444	76	65 (1.65)	86 (2.18)	68 (1.73)

*SYSTEM CONFIGURATION DIFFERS FROM MODEL SHOWN

**380 VOLT DATA PROVIDED AT 50HZ
ALL OTHER VOLTAGES ARE RATED AT 60 HZ

ADDITIONAL MODELS AVAILABLE UPON REQUEST



600 Prime Place, Hauppauge
NY 11788, USA
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986